

MINO 40 reflector


suspended
042-1216138R



Project / Type

Notes

Count / Date

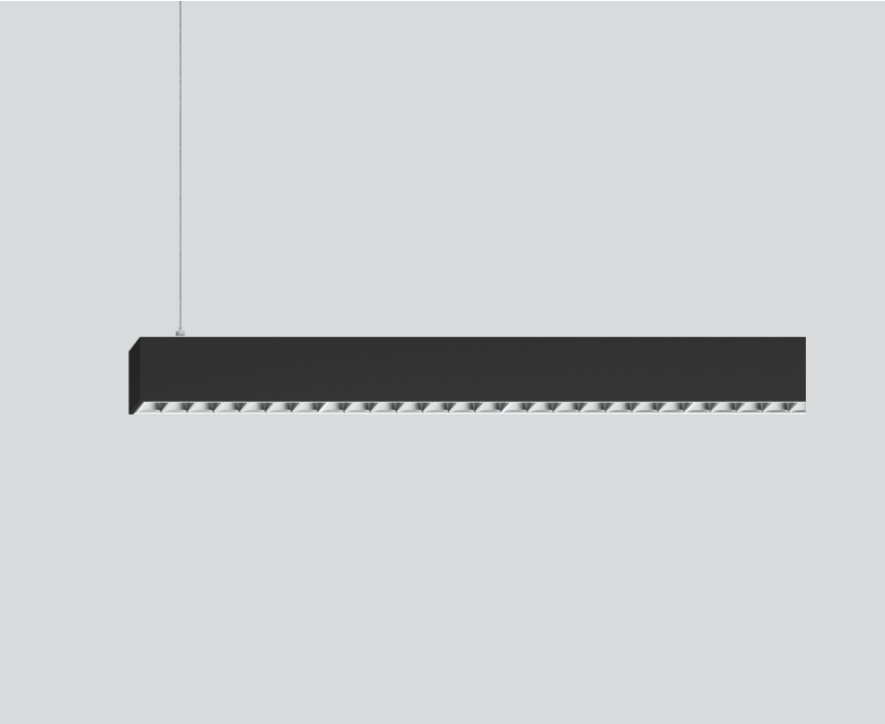

General

Ceiling , Suspended

black , RAL 9005 ¹

Reflector chrome

3180 lm/m

IP20

9510 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 90

MR 0.81

MDER 0.74

Optical

Reflector

Symmetric

UGR < 19 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 67 W

PC1 220-240V

system 142 lm/W³

22 W/m

Physical


length 3008 mm

width 40 mm


height 65 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



Product drawing



Installation instructions

Lighting calculator

