

MINO 40 reflector


suspended
042-1216137B



Project / Type

Notes

Count / Date

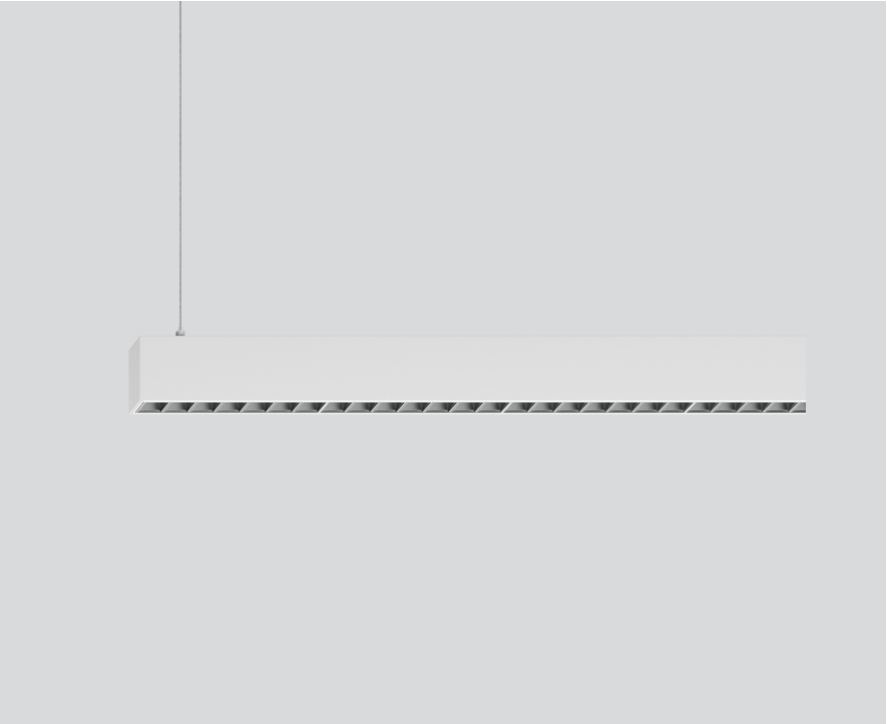

General
Ceiling , Suspended
RAL Pure white , RAL 9010 ¹
Reflector dark chrome
2370 lm/m
IP20
7090 lm

LED
4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 92 , R ₍₁₋₁₅₎ : 90
MR 0.81
MDER 0.74


Optical
Reflector
Symmetric
UGR < 19 , ≥65° <1500 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical
DALI-2
67 W
PC1 220-240V
106 lm/W
22 W/m


Physical
length 3008 mm
width 40 mm
height 65 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator



[“042-1216137B”] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com