

# MINO 40 reflector

suspended


042-1216038B



Project / Type

Notes

Count / Date

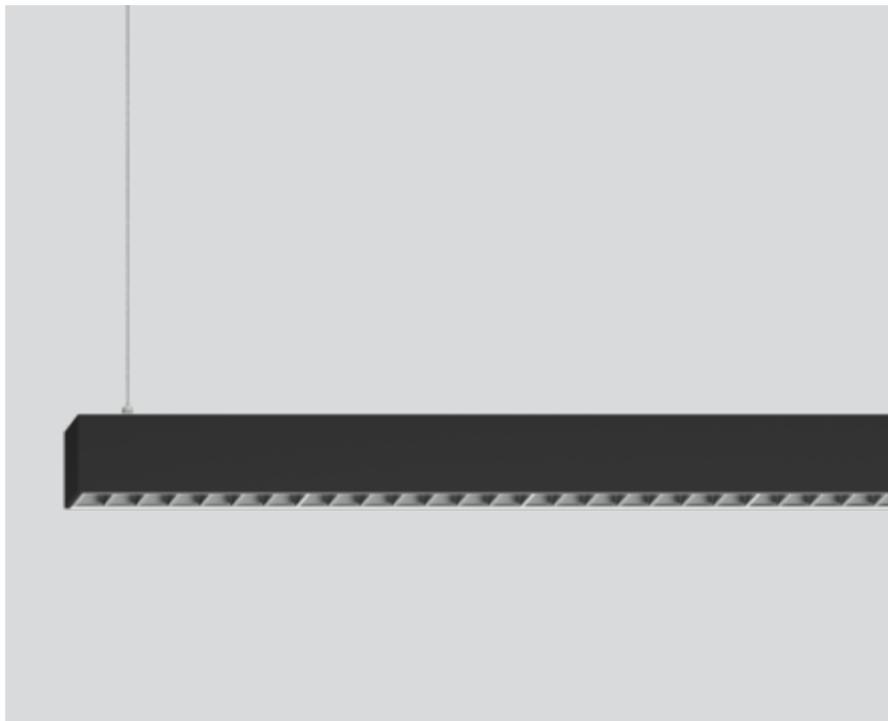

## General

Ceiling , Suspended

black , RAL 9005 <sup>1</sup>

Reflector dark chrome

IP20

6560 lm

2190 lm/m

## LED

3000 K

CRI  $\geq$  90

L90 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.61

MDER 0.55

## Optical

Reflector

Symmetric

UGR  $<$  16 ,  $\geq$ 65°  $<$ 1500 cd/m<sup>2</sup>

P<sub>stLM</sub>  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 67 W

system 98 lm/W<sup>3</sup>

PC1

22 W/m

## Physical

length 3008 mm

width 40 mm


height 65 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface black powder coated; suspended luminaire with 1500mm cable suspension; height adjustment without tools; incl. feed (black); luminaire profile can be pre-mounted; remaining lamp components mounted without tools; LED light inset incl. high gloss reflector with faceted design; Reflector dark chrome; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; UGR  $\leq$  16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq$  1500 cd/m<sup>2</sup>; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

