

# MINO 40 reflector

suspended


042-1213138B



Project / Type

Notes

Count / Date

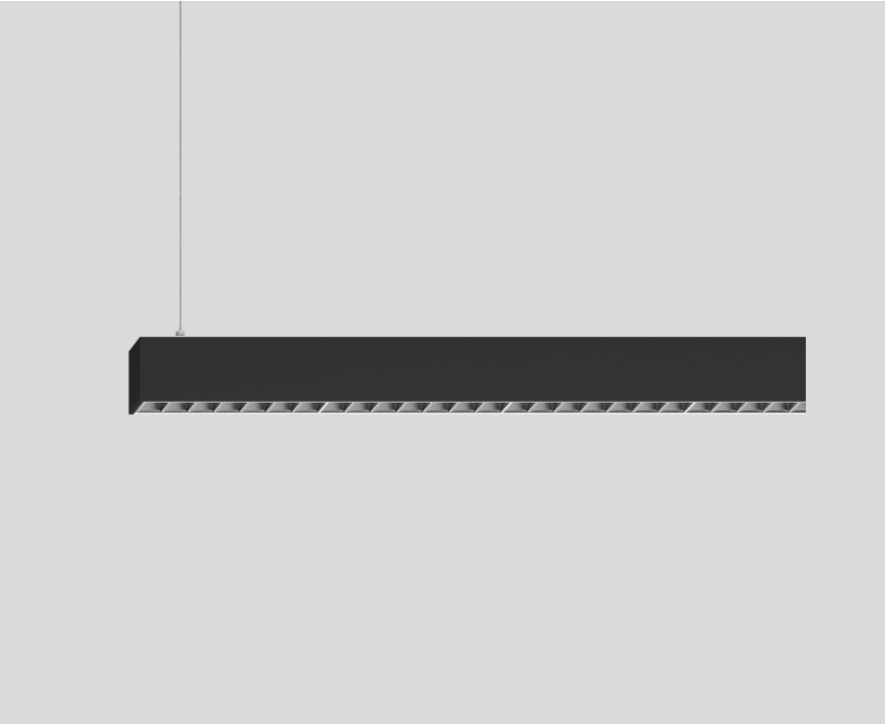

### General

Ceiling , Suspended

black , RAL 9005 <sup>1</sup>

Reflector dark chrome

2430 lm/m

IP20

3630 lm

### LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 90

MR 0.81

MDER 0.74

### Optical

Reflector

Symmetric

UGR < 19 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

36 W

PC1 220-240V

101 lm/W

24 W/m

### Physical


length 1508 mm

width 40 mm

height 65 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator

