


MINO CIRCLE ACOUSTIC

1500

suspended
034-272211S



Project / Type	
Notes	
Count / Date	

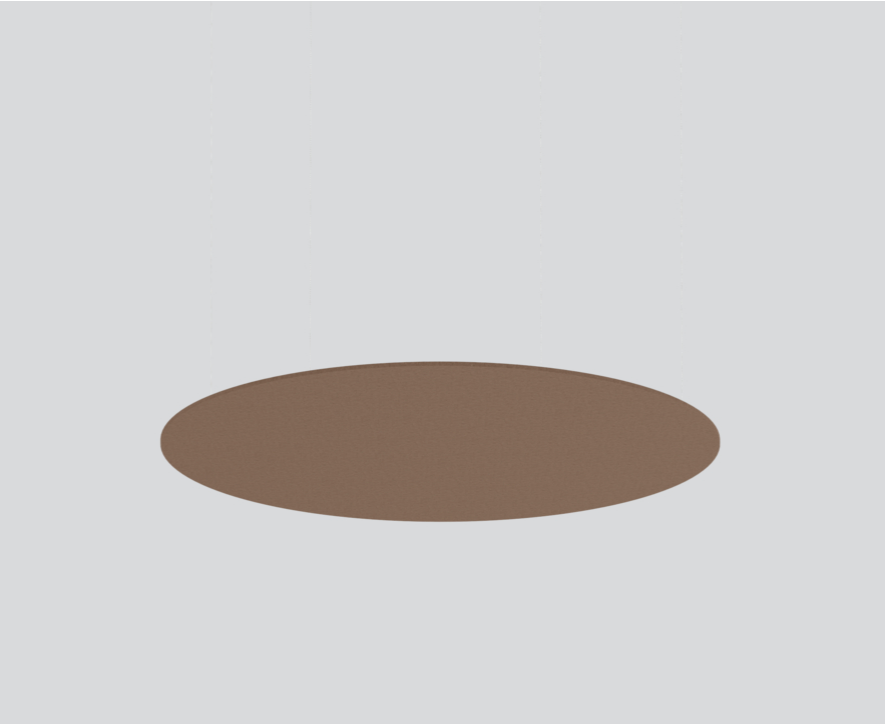

General
Ceiling , Suspended
limestone

Physical
diameter 1434 mm
height 24 mm

Acoustics
Alpha w (α_w) up to 0.65 ¹
SAC (sound absorption class) up to C ¹
NRC up to 0.7 ¹
SAA up to 0.74 ¹


¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, limestone; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing





Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.97	1.2	1.83	2.67	3.07	3.3

Sound absorption coefficient (α_p)

