




Project / Type

Notes

Count / Date

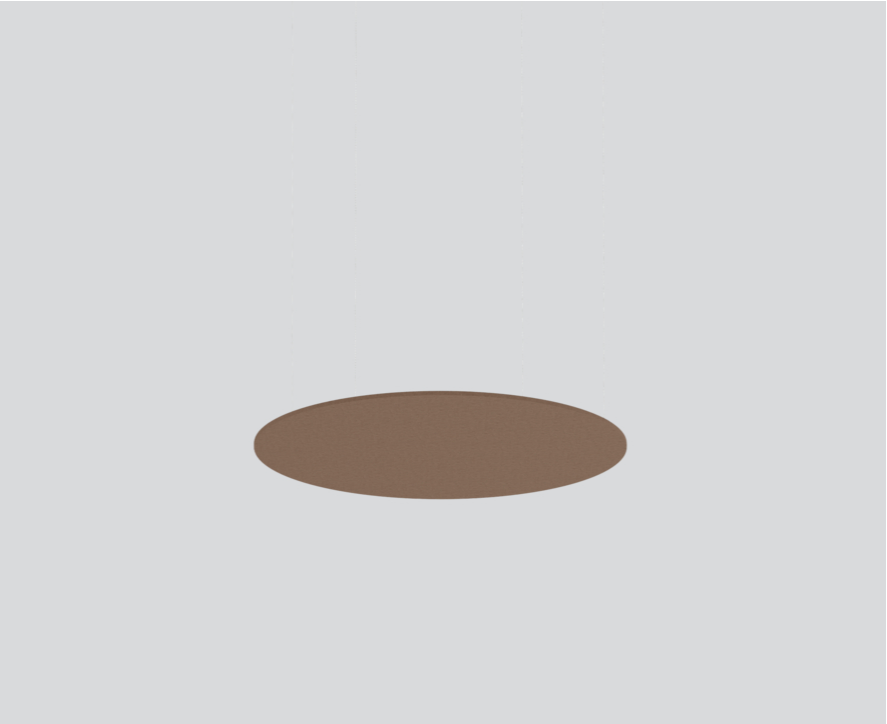

General

Ceiling , Suspended

limestone

Physical

diameter 937 mm

height 24 mm

Acoustics

Alpha w (α_w) 0.65 ¹

SAC (sound absorption class) C ¹

NRC 0.7 ¹

SAA 0.74 ¹


¹ Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 50% recycled PET; round design; high quality visual and tactile surface, limestone; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing





Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.5	0.5	0.87	1.3	1.43	1.57

Sound absorption coefficient (a_p)

