

# SASSO 60 square downlight

semi-recessed


048-30010114S 002-90746



Project / Type

Notes

Count / Date

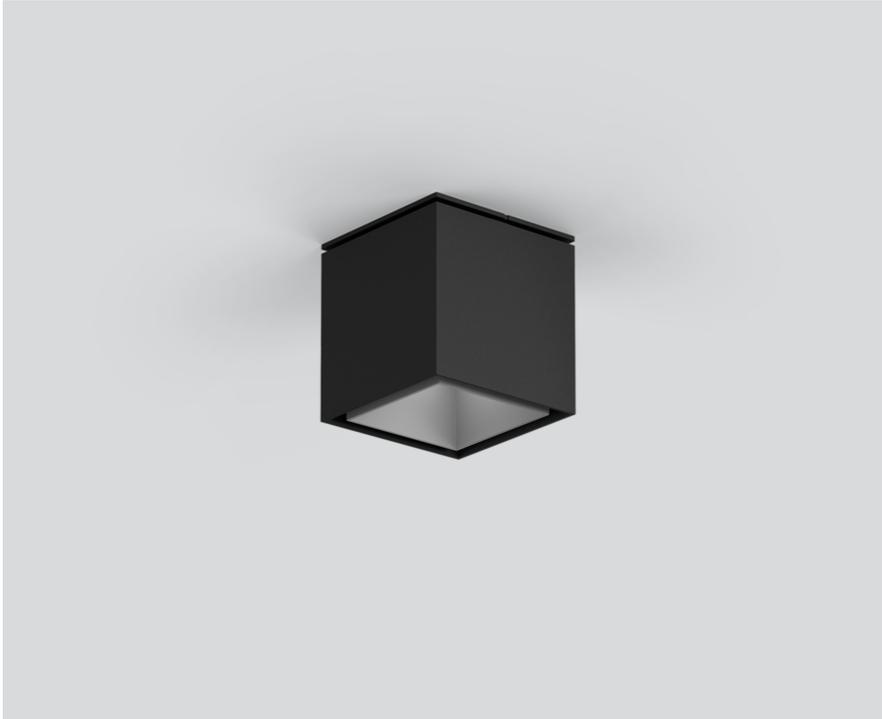

## General

Ceiling , Semi-Recessed  
black , RAL9005/matt silver <sup>1</sup>  
Inner colour matt silver  
front IP40 , back IP20  
613 lm

## LED

3000 K  
CRI ≥ 90  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>[1-15]</sub>: 87  
MR 0.6  
MDER 0.54

## Optical

spot  
beam angle 12°  
UGR < 16 , ≥65° <1500 cd/m<sup>2</sup>  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2  
system 10.4 W  
inset 8.8 W  
36 Vf  
250 mA  
PC2 220-240V  
system 59 lm/W<sup>3</sup>  
inset 69 lm/W<sup>4</sup>  
1 DALI Addr.

## Physical


length 72 mm  
width 72 mm  
height 75 mm  
0.52 kg

## Cutout


diameter 60 mm  
recessed depth 120 mm

Square semi-recessed spotlight made of aluminium; surface black (housing/light inset); luminaire housing can be attached to mounting plate without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m<sup>2</sup>; degree of protection IP40; PC2 220-240V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator



# SASSO 60 square downlight

semi-recessed

048-30010114S 002-90746



Project / Type

Notes

Count / Date

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

## Components

### POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
28 W	143-43-30	002-90746

## Optional electrical accessories

### DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



### DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2   200-1050 mA   2 x 42W	36-88-59	005-6121030

