

SASSO 60 round adjustable

trim 2 lamps


048-2622919M 048-269831G 002-90746



Project / Type _____

Notes _____

Count / Date _____

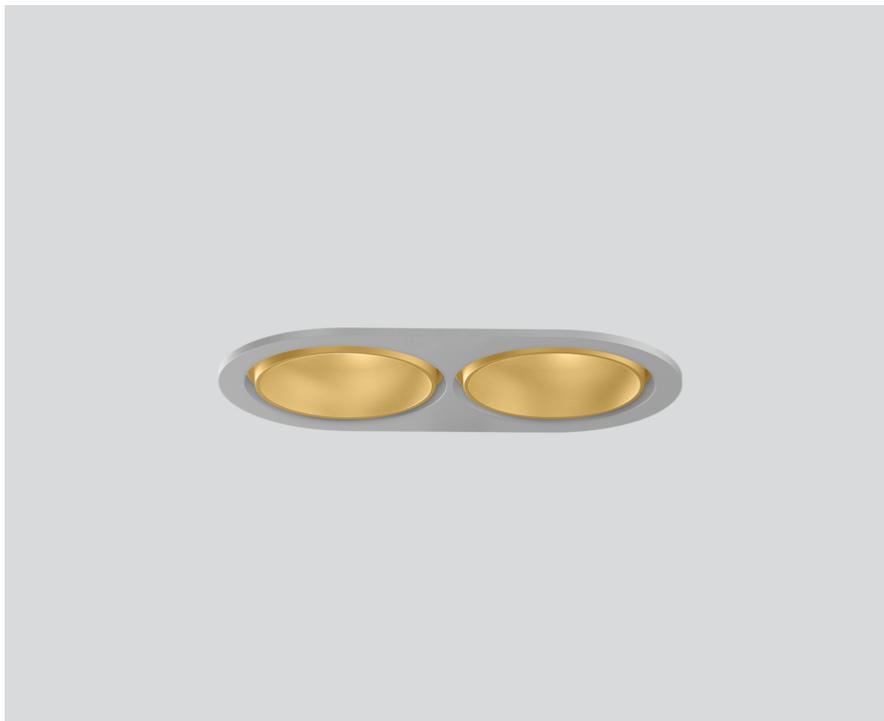

General

Ceiling , Recessed
 tilt max 30°
 rotation 360°
 gold , RAL260-M ¹
 Mounting set white aluminium
 front IP40 , back IP20
 1550 lm

LED

2700 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 2 SDCM
 R_g: 97 , R_r: 91 , R₍₁₋₁₅₎: 87
 MR 0.52
 MDER 0.47

Optical

medium
 beam angle 21°
 UGR < 16 , ≥65° <3000 cd/m²
 PstLM ≤ 1.0 ²
 SVM ≤ 0.4 ²

Electrical

DALI-2
 20.5 W
 inset 8.7 W
 36 Vf
 250 mA
 total insets 17.4 W
 PC2 220-240V
 76 lm/W
 inset 89 lm/W
 1 DALI Addr.

Physical

trim
 length 147 mm
 width 80 mm
 height 48 mm
 0.34 kg


Cutout

diameter 70 mm
 length 70 mm
 width 136 mm
 min. ceiling thickness 2 mm
 max. ceiling thickness 25 mm
 recessed depth 110 mm


¹ RAL code ² Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 21° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

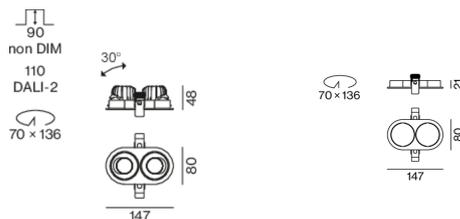

SASSO 60 round adjustable

trim 2 lamps

048-2622919M 048-269831G 002-90746



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



SASSO 60 round adjustable

trim 2 lamps

048-2622919M 048-269831G 002-90746



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.964	0.923	0.884	0.847	0.811
LSF	1	1	1	1	1

$MF = LMF \times RSMF \times LLMF \times LSF$
 MF Maintenance Factor
 LMF^a Luminaire Maintenance Factor
 RSMF^a Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

Components

MOUNTING SET with trim 2 lamps

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	white aluminium	147-80-21	048-269831G



POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
28 W	143-43-30	002-90746

Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030

