

# SASSO 60 round adjustable

trimless

048-2622019F 048-2696117 002-90746



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

tilt max 30°

rotation 360°

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

front IP40 , back IP20

829 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-5)</sub>: 87

MR 0.6

MDER 0.54

## Optical

flood

beam angle 39°

UGR < 16 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 10.2 W

inset 8.7 W

36 Vf

250 mA

PC2

system 81 lm/W<sup>3</sup>

inset 95 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trimless

diameter 73 mm

height 48 mm

0.28 kg

## Cutout


diameter 73 mm

recessed depth 120 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Light distribution



## Product drawing

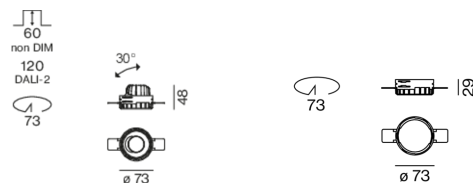

## Installation instructions



## Lighting calculator



[048-2622019F 048-2696117 002-90746] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

30.01.2025

1 / 1