

SASSO 60 round downlight

trim 2 lamps

048-2602119W 048-269831G 002-90746



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

gold , RAL260-M ¹

Mounting set white aluminium

front IP44 , back IP20

1930 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88

MR 0.8

MDER 0.72

Optical

wide flood

beam angle 55°

≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 20.1 W

inset 8.5 W

36 Vf

250 mA

total insets 17.1 W

PC2 220-240V

system 96 lm/W³

inset 113 lm/W⁴

1 DALI Addr.

Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.34 kg

Cutout

diameter 70 mm

length 70 mm

width 136 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)


³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Light distribution



Product drawing

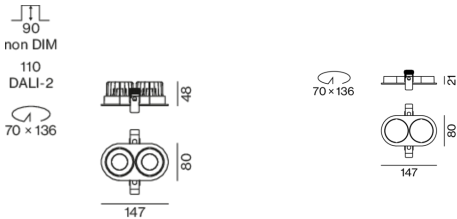

SASSO 60 round downlight

trim 2 lamps

048-2602119W 048-269831G 002-90746



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

