



TRIG-O

ceiling

EN Triangular luminaires & acoustic elements, suitable for single or group installation; quick mounting system without tools; light housing from extruded aluminium profile, seamlessly welded; surface powder coated; same luminance for all size versions; energy-efficient LEDs with very good colour rendering; plug-in terminals for through wiring; acoustic elements: **MODULE** in the luminaires' dimensions, **FLAT** with reduced height, **ABSORBER** to combine with other housings; acoustic element made of high-quality recycled PET felt; improvement of room acoustics through absorption and scattering of sound waves


DE Dreieckige Leuchten & Akustik-elemente, geeignet für Einzel- und Gruppenmontage; werkzeugloses Schnellmontagesystem; Leuchtenkörper aus Aluminiumstrangpressprofil, nahtlos verschweißt; Oberfläche pulverbeschichtet; gleiche Leuchtdichte bei allen Größenvarianten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Steckklemme für Weiterverdrahtung; Akustik-elemente: **MODULE** in Abmessungen der Leuchten, **FLAT** mit reduzierter Höhe, **ABSORBER** zur Kombination mit anderen Körpern; Akustik-elemente aus hochwertigem, recyceltem PET-Filz; Verbesserung der Raumakustik durch Absorption und Schallstreuung

Quickinfo

3000 K, 4000 K
 CRI ≥ 80 , 3 SDCM
 UGR ≤ 19 / $65^\circ \leq 3000 \text{ cd/m}^2$
 up to 143 lm/W
 L90 @ 50 000 h
 DALI-2
 opal, microprismatic (UGR ≤ 19)

acoustic elements
 up to absorption class A
 🔥 available as B-s1, d0

Types

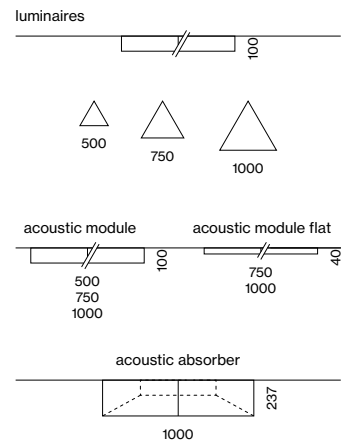


Luminaire colours



Acoustic colours



Light distribution



DIN EN 12464-1
 UGR ≤ 19

Order options

COLOUR TEMPERATURE	••
3000K	5
4000K	6

CONTROL

DALI-2

LUMINAIRE COLOUR

<input type="checkbox"/> pure white RAL 9010	7
<input checked="" type="checkbox"/> jet black RAL 9005	8
<input type="checkbox"/> special colours	X

ACOUSTIC COLOUR

<input type="checkbox"/> white	W
<input checked="" type="checkbox"/> black	L

other colours on request

LIGHT OPTIC COVER

<input type="checkbox"/> opal	O
<input checked="" type="checkbox"/> microprismatic (UGR ≤ 19)	P


Options on request

COLOUR RENDERING INDEX


CRI ≥ 90

COLOUR TEMPERATURE

tunable white (2700 – 6500 K)




TRIG-O 500 ceiling




SINGLE AND GROUP MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
12.8W	3000K	1420lm	on request
	4000K	1500lm	




TRIG-O 750 ceiling




SINGLE AND GROUP MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
23.5W	3000K	3120lm	on request
	4000K	3310lm	



TRIG-O 1000 ceiling



SINGLE AND GROUP MOUNTING


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
45W	3000K	6070lm	on request
	4000K	6430lm	

Acoustic elements

TRIG-O MODULE ceiling

SINGLE AND GROUP MOUNTING


TYPE	ORDER CODE
MODULE 500 ceiling	on request
MODULE 750 ceiling	on request
MODULE 1000 ceiling	on request



TRIG-O MODULE FLAT ceiling

SINGLE AND GROUP MOUNTING

TYPE	ORDER CODE
MODULE FLAT 750 ceiling	on request
MODULE FLAT 1000 ceiling	on request




TRIG-O ABSORBER

SINGLE AND GROUP MOUNTING

TYPE	ORDER CODE
ABSORBER 1000*	on request

*only in combination with TRIG-O 500 or MODULE 500



LUMINOUS FLUX white material
colour, opal light optic cover



TRIG-O

suspended (single mounted)

EN Triangular luminaires & acoustic elements; suitable for single installation; pendant fitting with cable suspension (3 cables); height adjustment without tools; light housing from extruded aluminium profile, seamlessly welded; powder coated; same luminance for all size versions; energy-efficient LEDs with very good colour rendering; transparent feed, canopy for through wiring (included); acoustic element made of high-quality recycled PET felt: **MODULE** in the luminaires' dimensions, **FLAT** with reduced height, **ABSORBER** to combine with other housings; improvement of room acoustics (absorption & scattering of sound waves)

DE Dreieckige Leuchten & Akustikelemente; geeignet für Einzelmontage; abgependelt mit Seilabhängung (3 Seile); werkzeuglose Höhenverstellung; Leuchtenkörper aus Aluminiumstrangpressprofil, nahtlos verschweißt; pulverbeschichtet; gleiche Leuchtdichte bei allen Größenvarianten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; transparente Einspeiseleitung, Baldachin für Weiterverdrahtung (inkludiert); Akustikelemente aus hochwertigem, recyceltem PET-Filz: **MODULE** in Abmessungen der Leuchten, **FLAT** mit reduzierter Höhe, **ABSORBER** zur Kombination mit anderen Körpern; Verbesserung der Raumakustik (Absorption & Schallstreuung)


Quickinfo

3000 K, 4000 K
 CRI ≥ 80, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 143 lm/W
 L90 @ 50 000 h
 DALI-2
 opal, microprismatic (UGR ≤ 19)


acoustic elements
 up to absorption class A
 🔥 available as B-s1, d0

Types


luminaires



acoustic module



acoustic module flat



Luminaire colours




Acoustic colours



Light distribution



direct



DIN EN 12464-1
 UGR ≤ 19

Order options

SUSPENSION

cable 1500 mm

COLOUR TEMPERATURE

3000K	5
4000K	6

CONTROL

DALI-2

LUMINAIRE COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours*	X

*canopy always in white

ACOUSTIC COLOUR

○ white	W
● black	L

other colours on request

LIGHT OPTIC COVER

opal	O
microprismatic (UGR ≤ 19)	P


Options on request

COLOUR RENDERING INDEX


CRI ≥ 90

COLOUR TEMPERATURE

tunable white (2700– 6500 K)




TRIG-O 500 suspended




SINGLE MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
12.8W	3000K	1420lm	on request
	4000K	1500lm	




TRIG-O 750 suspended




SINGLE MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
23.5W	3000K	3120lm	on request
	4000K	3310lm	



TRIG-O 1000 suspended



SINGLE MOUNTING


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
45W	3000K	6070lm	on request
	4000K	6430lm	

Acoustic elements

TRIG-O MODULE suspended

SINGLE MOUNTING

TYPE	ORDER CODE
MODULE 500 suspended	on request
MODULE 750 suspended	on request
MODULE 1000 suspended	on request



TRIG-O MODULE FLAT suspended

SINGLE MOUNTING

TYPE	ORDER CODE
MODULE FLAT 750 suspended	on request
MODULE FLAT 1000 suspended	on request




TRIG-O ABSORBER

SINGLE MOUNTING

TYPE	ORDER CODE
ABSORBER 1000*	on request

*only in combination with TRIG-O 500 or MODULE 500



LUMINOUS FLUX white material colour, opal light optic cover



TRIG-O

suspended (group mounted)

EN Triangular luminaires & acoustic elements; suitable for group installation; pendant fitting with cable suspension (1 cable); height adjustment without tools; rear rail for alignment; light housing from extruded aluminium profile, seamlessly welded; powder coated; same luminance for all size versions; energy-efficient LEDs with very good colour rendering; transparent feed, canopy for through wiring (separately available); acoustic element made of high-quality recycled PET felt: MODULE in the luminaires' dimensions, FLAT with reduced height, ABSORBER to combine with other housings; improvement of room acoustics (absorption & scattering of sound waves)

DE Dreieckige Leuchten & Akustikelemente; geeignet für Gruppenmontage; abgependelt mit Seilabhangung (1 Seil); werkzeuglose Hohenverstellung; ruckseitige Schiene zur Ausrichtung; Leuchtenkorper aus Aluminiumstrangpressprofil, nahtlos verschweit; pulverbeschichtet; gleiche Leuchtdichte bei allen Groenvarianten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; transparente Einspeiseleitung, Baldachin fur Weiterverdrahtung (separat zu bestellen); Akustikelemente aus hochwertigem, recyceltem PET-Filz: MODULE in Abmessungen der Leuchten, FLAT mit reduzierter Hohe, ABSORBER zur Kombination mit anderen Korpern; Verbesserung der Raumakustik (Absorption & Schallstreuung)


Quickinfo

3000 K, 4000 K
 CRI \geq 80, 3 SDCM
 UGR \leq 19 / 65° \leq 3000 cd/m²
 up to 143 lm/W
 L90 @ 50000h
 DALI-2
 opal, microprismatic (UGR \leq 19)


acoustic elements
 up to absorption class A
 available as B-s1, d0

Types


luminaires




acoustic module



acoustic module flat



acoustic absorber



Luminaire colours




Acoustic colours



Light distribution



direct



DIN EN 12464-1
 UGR \leq 19

Order options

SUSPENSION

cable 1500 mm

COLOUR TEMPERATURE

3000K	5
4000K	6

CONTROL

DALI-2

LUMINAIRE COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours*	X

*canopy always in white

ACOUSTIC COLOUR

○ white	W
● black	L

other colours on request

LIGHT OPTIC COVER

opal	O
microprismatic (UGR ≤ 19)	P







Options on request

COLOUR RENDERING INDEX

CRI ≥ 90


COLOUR TEMPERATURE

tunable white (2700– 6500 K)



LUMINOUS FLUX white material
colour, opal light optic cover

TRIG-O 500 suspended




GROUP MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
12.8W	3000K	1420lm	on request
	4000K	1500lm	

order power feeder separately; only one per group needed

TRIG-O 750 suspended




GROUP MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
23.5W	3000K	3120lm	on request
	4000K	3310lm	

order power feeder separately; only one per group needed

TRIG-O 1000 suspended



GROUP MOUNTING

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
45W	3000K	6070lm	on request
	4000K	6430lm	

order power feeder separately; only one per group needed

Electrical accessories

POWER FEEDER max. 500 W

TYPE	ORDER CODE
non DIM, 3x1,5mm² L 1500 mm	on request
DALI-2, 5x1,5mm² L 1500 mm	on request

can be placed above luminaires or acoustic elements

Acoustic elements

TRIG-O MODULE suspended

GROUP MOUNTING

TYPE	ORDER CODE
MODULE 500 suspended	on request
MODULE 750 suspended	on request
MODULE 1000 suspended	on request

TRIG-O MODULE FLAT suspended

GROUP MOUNTING

TYPE	ORDER CODE
MODULE FLAT 750 suspended	on request
MODULE FLAT 1000 suspended	on request

TRIG-O ABSORBER

GROUP MOUNTING

TYPE	ORDER CODE
ABSORBER 1000*	on request

*only in combination with TRIG-O 500 or MODULE 500