

JUST 32 FOCUS


MOVE IT 25
050-011111X



Project / Type _____

Notes _____

Count / Date _____

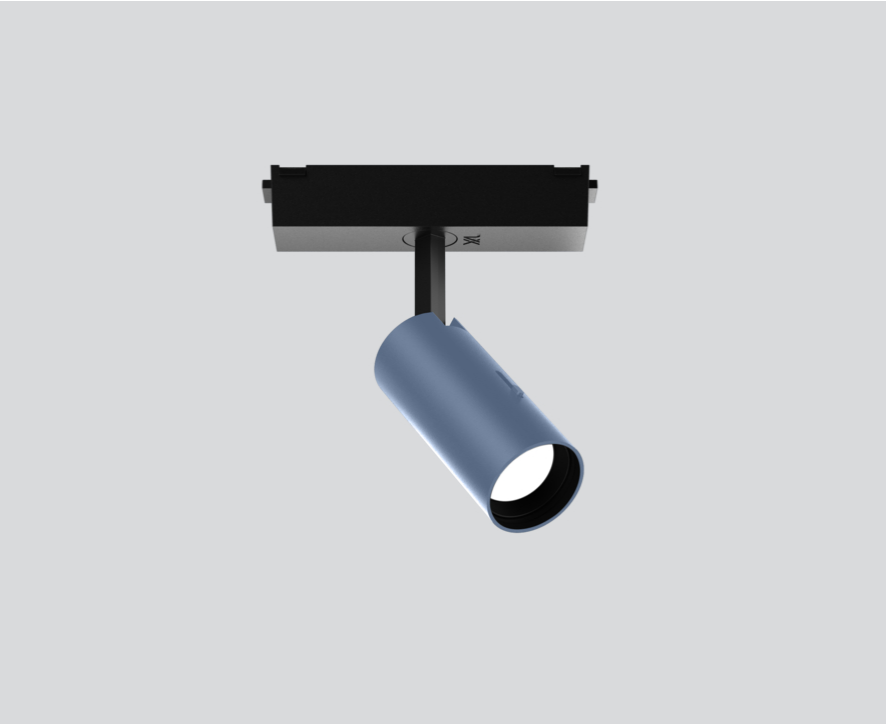

General

Ceiling / Wall , Track _____

tilt max 90° _____

rotation 360° _____

special colours _____

IP20 _____

347¹-429² lm _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

focus _____

beam angle 17°¹-43°² _____

Electrical

non DIM _____

5.5 W _____

PC3 48V _____

63¹-78² lm/W _____

Physical


diameter 32 mm _____

height 73 mm _____

0.2 kg _____


Cylindrical spotlight in aluminium; surface special colours powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality plano-convex glass lens; precise object focusing through adjustable lens; adjustable beam angle of 17° - 43°; focusing by means of patented slider on the spotlight head; degree of protection IP20; PC3 48V; non-dimmable; optical attachment available as accessory; accessories are listed separately; light source not replaceable;

Light distribution

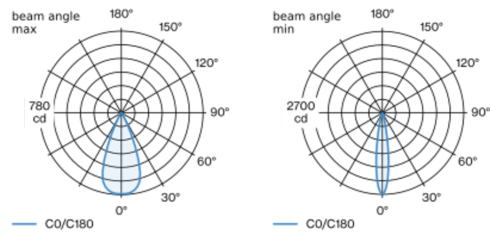

focus 43°			focus 17°		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	772	0.80	1	2680	0.30
2	193	1.59	2	670	0.59
3	86	2.39	3	300	0.89
4	48	3.18	4	170	1.19
5	31	3.98	5	110	1.49

Product drawing



¹ beam angle min ² beam angle max

Installation instructions



[‘050-011111X’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com