

JUST 45 MOVE IT 25 / 25 S / 45


050-013113XM



Project / Type _____

Notes _____

Count / Date _____

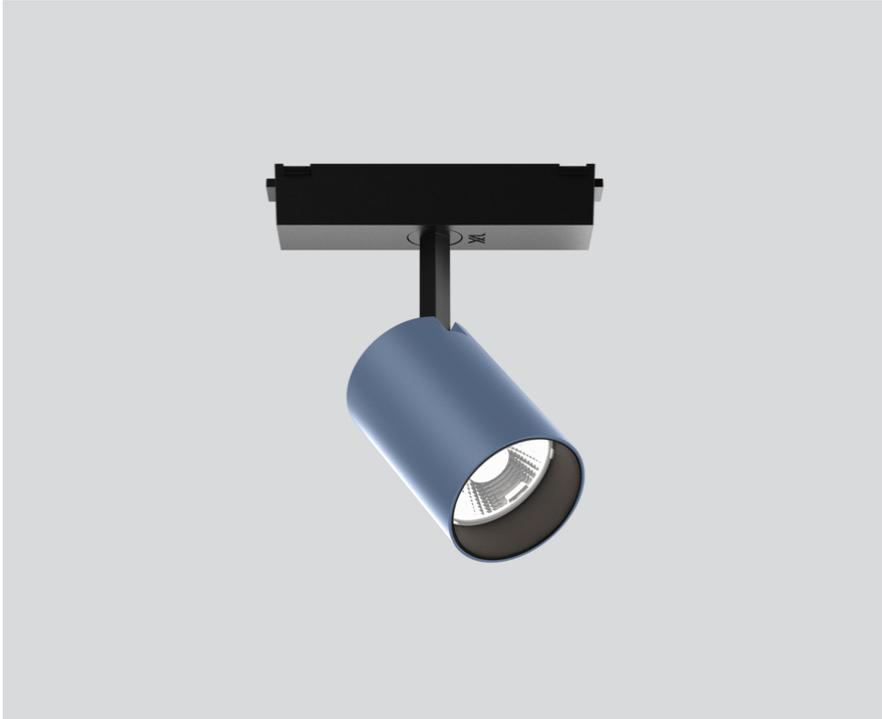

General

Ceiling , Track _____
tilt max 90° _____
rotation 360° _____
special colours _____
IP20 _____
947 lm _____
optical inset 116 lm/W¹ _____

LED

4000 K _____
CRI ≥ 90 _____
L80 / 50000 h _____
initial MacAdam ≤ 2 SDCM _____
R_g: 98 , R_r: 90 , R_{t(1-15)}: 88 _____
MR 0.8 _____
MDER 0.72 _____

Optical

medium _____
beam angle 23° _____
P_{stLM} ≤ 1.0² _____
SVM ≤ 0.4² _____

Electrical

DALI-2 single control _____
48 V _____
fixture 10.9 W _____
optical inset 8.2 W _____
PC3 _____
1 DALI Addr. _____

Physical


diameter 45 mm _____
height 68 mm _____
0.2 kg _____

¹ OPTICAL INSET: incl. consideration of optical losses

² Value of containing product at full load (undimmed)

Cylindrical spotlight in aluminium; surface special colours powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 23° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); optical attachment available as accessory; accessories are listed separately; light source not replaceable;


Light distribution



medium 23°

h (m)	E0° (lx)	ø (m)
1	4770	0.40
2	1190	0.81
3	530	1.21
4	300	1.62
5	190	2.02

Product drawing



Installation instructions



Lighting calculator



JUST 45 MOVE IT 25 / 25

S / 45

050-013113XM



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.964	0.923	0.884	0.847	0.811
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Optical accessories

HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	42	007-1965188

