

# JUST 45 MOVE IT 25 / 25 S / 45

050-0131137V



Project / Type

Notes

Count / Date



## General

Ceiling , Track

tilt max 90°

rotation 360°

white , RAL 9016 <sup>1</sup>

IP20

323 lm

optical inset 71 lm/W<sup>2</sup>

## LED

4000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 94 , R<sub>r</sub>: 87 , R<sub>(1-15)</sub>: 90

MR 0.86

MDER 0.78

## Optical

super spot

beam angle 8°

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

## Electrical

DALI-2 single control

48 V

fixture 6.0 W

optical inset 4.5 W

PC3

1 DALI Addr.

## Physical

diameter 45 mm

height 68 mm

0.2 kg

<sup>1</sup> RAL code


<sup>2</sup> OPTICAL INSET: incl. consideration of optical losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions




## Lighting calculator

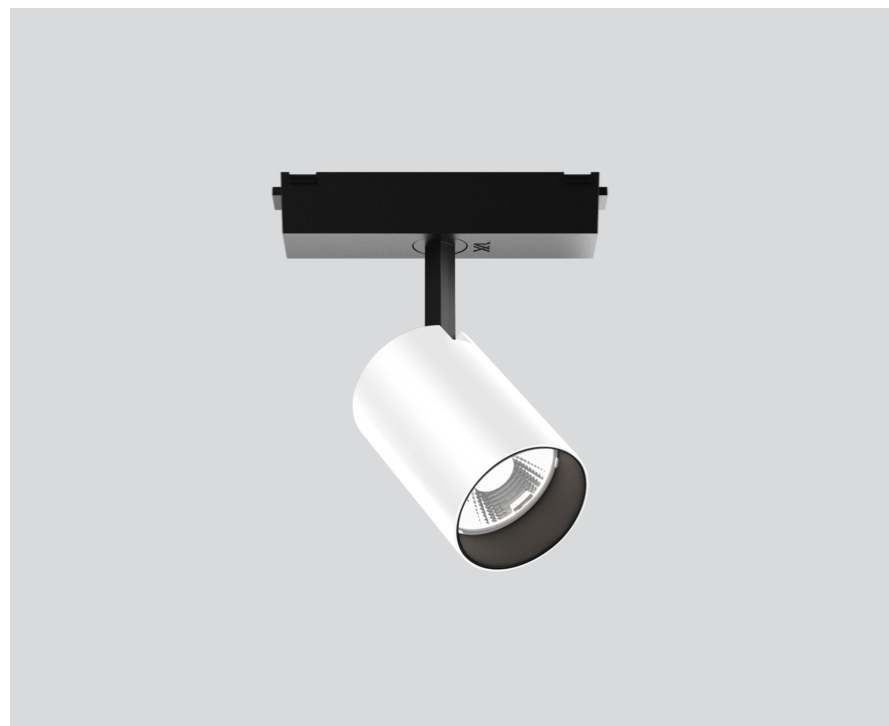

Cylindrical spotlight in aluminium; surface white powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with high power LED for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 8° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); optical attachment available as accessory; accessories are listed separately; light source not replaceable;

## Light distribution



super spot 8°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 11300    | 0.14  |
| 2     | 2800     | 0.28  |
| 3     | 1300     | 0.41  |
| 4     | 700      | 0.55  |
| 5     | 500      | 0.69  |

## Product drawing

