

# JUST 45 MOVE IT 25 / 25 S / 45


050-013103XV



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

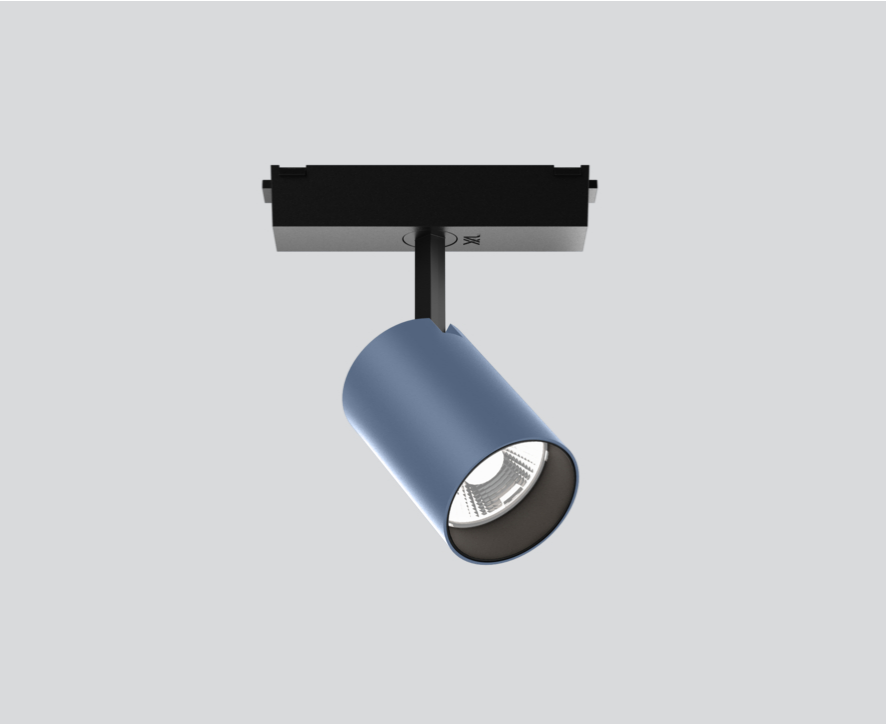

### General

Ceiling , Track \_\_\_\_\_

tilt max 90° \_\_\_\_\_

rotation 360° \_\_\_\_\_

special colours \_\_\_\_\_

IP20 \_\_\_\_\_

258 lm \_\_\_\_\_

### LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 98 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89 \_\_\_\_\_

MR 0.6 \_\_\_\_\_

MDER 0.55 \_\_\_\_\_

### Optical

super spot \_\_\_\_\_

beam angle 8° \_\_\_\_\_

PstLM ≤ 1.0 <sup>1</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>1</sup> \_\_\_\_\_

Cylindrical spotlight in aluminium; surface special colours powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with high power LED for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 8° beam; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); optical attachment available as accessory; accessories are listed separately; light source not replaceable;

### Electrical

DALI-2 single control \_\_\_\_\_

system 6.0 W \_\_\_\_\_

PC3 48V \_\_\_\_\_

system 43 lm/W<sup>2</sup> \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_


### Physical

diameter 45 mm \_\_\_\_\_

height 68 mm \_\_\_\_\_

0.2 kg \_\_\_\_\_


### Light distribution



super spot 8°

h (m)	E0° (lx)	ø (m)
1	9020	0.14
2	2250	0.28
3	1000	0.41
4	560	0.55
5	360	0.69

### Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

### Installation instructions



### Lighting calculator

