


FRAME 40 reflector

trim system

042-0116037B 042-7006018



Project / Type
Notes
Count / Date

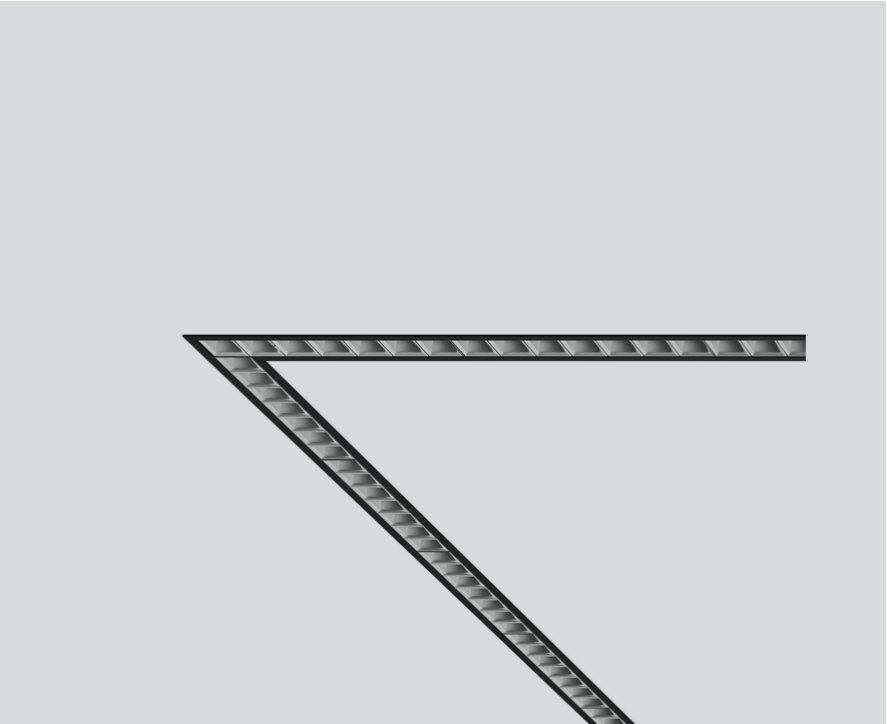

Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; for continuous lighting systems; suitable for ceiling thickness of 8-25 mm; surface black powder coated; luminaire profile can be pre-mounted; pre-assembled power rail for power supply in luminaire profile; voltage tap of the light inset on the power rail; remaining lamp components mounted without tools; LED light inset incl. high gloss reflector with faceted design; Reflector dark chrome; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; UGR ≤ 16 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; degree of protection IP20; PC1 220-240V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



220-240V	X-PERT	UGR ≤ 16	cd/m^2 ≤ 1500	CRI ≥ 90	RAL 9005	X-PERT
----------	--------	---------------	-----------------------------	---------------	----------	--------

General

Ceiling , Suspended
black , RAL 9005 ¹
Reflector dark chrome
2190 lm/m
IP20
6560 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89
MR 0.61
MDER 0.55

Optical

Reflector
Symmetric
UGR < 16 , $\geq 65^\circ < 1500 \text{ cd/m}^2$
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
67 W
PC1 220-240V
98 lm/W
1 DALI Addr.
22 W/m

Physical

length 3000 mm
width 55 mm
height 60 mm

Cutout

length 3010 mm
width 45 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

