

SASSO 100 square wallwasher/floor

trim

048-2750214W 048-2797318 002-90780



Project / Type _____


Notes _____

Count / Date _____




Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

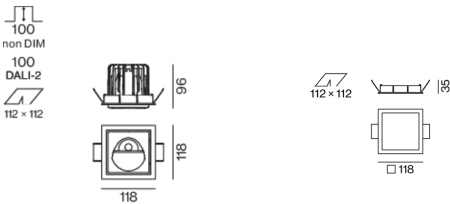

General

Ceiling , Recessed _____
matt silver _____
Mounting set jet black _____
IP20 _____
2750 lm _____
fixture 128 lm/W¹ _____

LED

3500 K _____
CRI ≥ 90 _____
L80 / 50000 h _____
initial MacAdam ≤ 2 SDCM _____
R_g: 99 , R_f: 90 , R₍₁₋₁₅₎: 89 _____
MR 0.7 _____
MDER 0.64 _____

Optical

wallwasher floor _____

Electrical

non DIM _____
220-240 V _____
system 25.2 W _____
fixture 21.5 W _____
36 Vf _____
650 mA _____
PC2 _____

Physical

trim _____
length 118 mm _____
width 118 mm _____
height 96 mm _____
0.69 kg _____

Cutout

length 112 mm _____
width 112 mm _____
min. ceiling thickness 2 mm _____
max. ceiling thickness 25 mm _____
recessed depth 100 mm _____

¹ incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

