

SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740911W 048-2798317 002-90766



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |



General

| | |
|-------------------------------|--|
| Ceiling , Recessed | |
| rotation 360° | |
| black , RAL 9005 ¹ | |
| Mounting set traffic white | |
| IP20 | |
| 3740 lm | |
| fixture 128 lm/W ² | |

LED

| | |
|----------------------------------------------------------------------|--|
| 2700 K | |
| CRI ≥ 90 | |
| L80 / 50000 h | |
| initial MacAdam ≤ 2 SDCM | |
| R _g : 97 , R _r : 91 , R ₍₁₋₁₅₎ : 87 | |
| MR 0.52 | |
| MDER 0.47 | |

Optical

| | |
|--------------------------|--|
| wallwasher floor | |
| PstLM ≤ 1.0 ³ | |
| SVM ≤ 0.4 ³ | |

Electrical

| | |
|----------------|--|
| non DIM | |
| 220-240 V | |
| system 34 W | |
| fixture 14.6 W | |
| 36 Vf | |
| 450 mA | |
| fixture 29.2 W | |
| PC2 | |

Physical


| | |
|---------------|--|
| trim | |
| length 218 mm | |
| width 118 mm | |
| height 96 mm | |
| 0.6 kg | |

Cutout


| | |
|------------------------------|--|
| diameter 105 mm | |
| length 205 mm | |
| width 105 mm | |
| min. ceiling thickness 2 mm | |
| max. ceiling thickness 25 mm | |
| recessed depth 100 mm | |

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

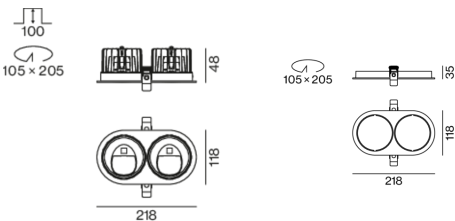

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

³ Value of containing product at full load (undimmed)



SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740911W 048-2798317 002-90766



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740911W 048-2798317 002-90766



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 31 |
| B16 | 49 |
| C10 | 51 |
| C16 | 83 |

Components

MOUNTING SET with trim 2 lamps

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|---------------|------------|-------------------|
| for intermediate ceilings | traffic white | 218-118-35 | 048-2798317 |



CONVERTER

| TYPE | ARTICLE NUMBER(S) |
|------|-------------------|
| 21 W | 002-90766 |

Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------|-------------|-------------------|
| white aluminium | 614-307-120 | 048-2695110 |



Optional electrical accessories

DIN RAIL POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63 | 005-6520210 |



DIN RAIL LED DRIVER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |



SASSO 100 round wallwasher/floor

trim 2 lamps
048-2740911W 048-2798317 002-90766



Project / Type

Notes

Count / Date

Optional electrical accessories

POWER SUPPLY PREWIRED

| TYPE | ARTICLE NUMBER(S) |
|-----------------------------|-------------------|
| with junktion box DALI-2 | 002-90767A |
| with junktion box DALI-2 | 002-90789A |
| with junktion box DALI-2 | 002-90776A |
| with junktion box non DIM | 002-90766A |
| with junktion box non DIM | 002-90780A |
| with junktion box non DIM | 002-90774A |

Electrical accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------------------------------------|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |

