

SASSO 100 round wallwasher/floor

trim


048-2740211W 048-279631G 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

black , RAL 9005 ¹ _____

Mounting set white aluminium _____

IP20 _____

2690 lm _____

fixture 126 lm/W² _____

LED

3500 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_r: 90 , R_{t(1-15)}: 89 _____

MR 0.7 _____

MDER 0.64 _____

Optical

wallwasher floor _____

Electrical

non DIM _____

220-240 V _____

system 25.2 W _____

fixture 21.5 W _____

36 Vf _____

650 mA _____

PC2 _____

Physical

trim _____

diameter 118 mm _____

height 96 mm _____

0.65 kg _____

Cutout

diameter 108 mm _____

min. ceiling thickness 2 mm _____


max. ceiling thickness 25 mm _____

recessed depth 100 mm _____


¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing

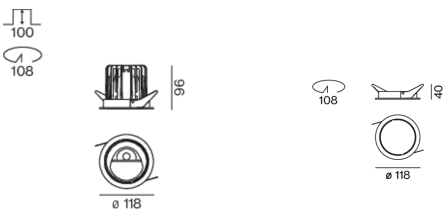

Installation instructions



Lighting calculator

