

# SASSO 100 round wallwasher/floor

trim 2 lamps

048-2740117W 048-279831G 002-90766



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set white aluminium

IP20

4180 lm

## LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.8

MDER 0.72

## Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

34 W

inset 14.6 W

36 Vf

450 mA

total insets 29.2 W

PC2 220-240V

123 lm/W

inset 143 lm/W

## Physical

trim

length 218 mm

width 118 mm

height 96 mm

0.78 kg

## Cutout

diameter 105 mm

length 205 mm

width 105 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

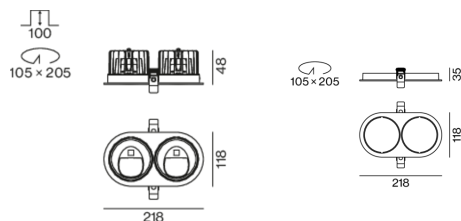

## Installation instructions



## Lighting calculator



[048-2740117W 048-279831G 002-90766] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.11.2024

1 / 1