

SASSO 100 round wallwasher/floor

trim

048-2740114W 048-279631G 002-90766



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

matt silver

Mounting set white aluminium

IP20

2080 lm

fixture 142 lm/W¹

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88

MR 0.8

MDER 0.72

Optical

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

220-240 V

system 17.2 W

fixture 14.6 W

36 Vf

450 mA

PC2

Physical

trim

diameter 118 mm

height 96 mm

0.67 kg

Cutout

diameter 108 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Light distribution



Product drawing

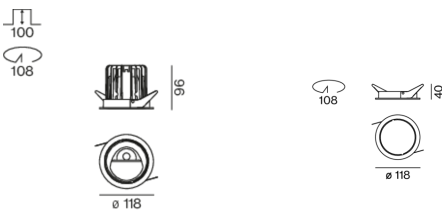

Installation instructions



Lighting calculator

