

# SASSO 100 square adjustable

trimless

048-2730219M 048-2797117 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## General

Ceiling , Recessed \_\_\_\_\_

tilt max 30° \_\_\_\_\_

gold , RAL 260-M <sup>1</sup> \_\_\_\_\_

Mounting set traffic white \_\_\_\_\_

front IP40 , back IP20 \_\_\_\_\_

2050 lm \_\_\_\_\_

fixture 90 lm/W<sup>2</sup> \_\_\_\_\_

## LED

3500 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.7 \_\_\_\_\_

MDER 0.64 \_\_\_\_\_

## Optical

medium \_\_\_\_\_

beam angle 31°x33° \_\_\_\_\_

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; 30° tiltable; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 31°x33° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 26.7 W \_\_\_\_\_

fixture 22.7 W \_\_\_\_\_

36 Vf \_\_\_\_\_

650 mA \_\_\_\_\_

PC2 \_\_\_\_\_

## Physical

trimless \_\_\_\_\_

length 105 mm \_\_\_\_\_

width 105 mm \_\_\_\_\_

height 95 mm \_\_\_\_\_

0.47 kg \_\_\_\_\_

## Cutout

length 106 mm \_\_\_\_\_

width 106 mm \_\_\_\_\_

min. ceiling thickness 12.5 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 100 mm \_\_\_\_\_


<sup>1</sup> RAL code

<sup>2</sup> incl. consideration of optical losses & internal control unit losses

## Light distribution



## Product drawing

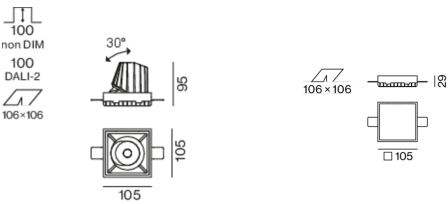

## Installation instructions



## Lighting calculator

