

# SASSO 100 square adjustable

trimless

048-2730119W 048-2797117 002-90766



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

tilt max 30°

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

front IP40 , back IP20

1770 lm

## LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.8

MDER 0.72

## Optical

wide flood

beam angle 60°

UGR < 19 , ≥65° <1500 cd/m<sup>2</sup>

P<sub>st</sub>LM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

17.9 W

inset 15.2 W

36 Vf

450 mA

PC2 220-240V

99 lm/W

inset 116 lm/W

## Physical

trimless

length 105 mm

width 105 mm

height 95 mm

0.49 kg

## Cutout

length 106 mm

width 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

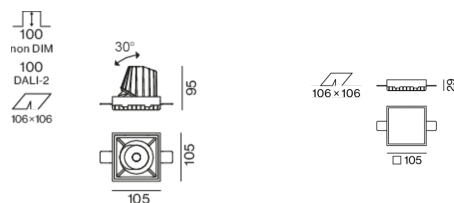

## Installation instructions



## Lighting calculator



[048-2730119W 048-2797117 002-90766] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

04.11.2024

1 / 1