

SASSO 100 round adjustable

trimless

048-2720919W 048-2796117 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 30°
 rotation 360°
 gold , RAL260-M ¹
 traffic white
 front IP40 , back IP20
 2220 lm

LED

2700 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 2 SDCM
 R_g: 97 , R_r: 91 , R₍₁₋₁₅₎: 87
 MR 0.52
 MDER 0.47

Optical

wide flood
 beam angle 60°
 ≥65° <3000 cd/m²

Electrical

non DIM
 system 26.7 W
 inset 22.7 W
 36 Vf
 650 mA
 PC2 220-240V
 system 83 lm/W²
 inset 98 lm/W³

Physical

trimless
 diameter 105 mm
 height 95 mm
 0.47 kg

Cutout

diameter 106 mm
 min. ceiling thickness 12.5 mm
 max. ceiling thickness 25 mm
 recessed depth 100 mm


¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)


³ incl. optical losses

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; traffic white; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

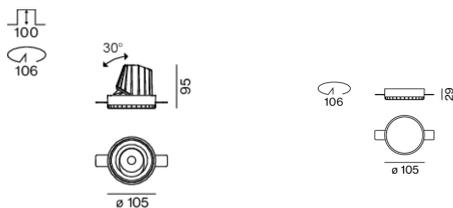

Installation instructions



Lighting calculator

