

SASSO 100 round adjustable

trimless exposed concrete

048-2720917W 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Recessed
tilt max 30°
rotation 360°
white , RAL 9016 ¹
Mounting set white aluminium
front IP40 , back IP20
2300 lm
fixture 101 lm/W ²

LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _f : 91 , R _{1-15} : 87
MR 0.52
MDER 0.47


Optical
wide flood
beam angle 59°

Electrical
non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2


Physical
trimless for exposed concrete ceiling
length 230 mm
width 230 mm
height 162 mm
2.58 kg

Cutout
recessed depth 100 mm

Light distribution



Product drawing

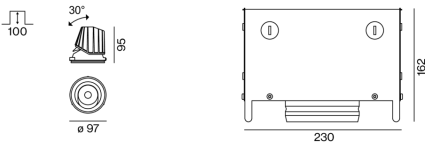

¹ RAL code

² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

