

SASSO 100 round adjustable

trimless

048-2720914F 048-2796117 002-90766



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 30°	
rotation 360°	
matt silver	
Mounting set traffic white	
front IP40 , back IP20	
1620 lm	
fixture 106 lm/W ¹	

LED

2700 K	
CRI ≥ 90	
L80 / 50000 h	
initial MacAdam ≤ 2 SDCM	
R _g : 97 , R _f : 91 , R _{1-15} : 87	
MR 0.52	
MDER 0.47	

Optical

flood	
beam angle 45°	
UGR ≤ 16 , ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
220-240 V	
system 17.9 W	
fixture 15.2 W	
36 Vf	
450 mA	
PC2	

Physical


trimless	
diameter 105 mm	
height 95 mm	
0.49 kg	

Cutout


diameter 106 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 45° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

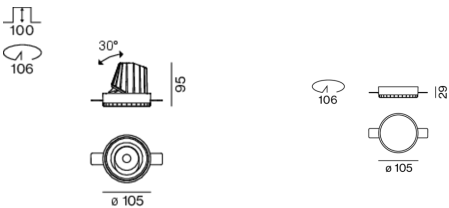

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

