

SASSO 100 round adjustable

trim 2 lamps

048-2720219W 048-2798318 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

gold , RAL260-M ¹ _____

Mounting set jet black _____

front IP40 , back IP20 _____

4720 lm _____

LED

3500 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_r: 90 , R_{t(1-15)}: 89 _____

MR 0.7 _____

MDER 0.64 _____

Optical

wide flood _____

beam angle 60° _____

≥65° <3000 cd/m² _____

Electrical

non DIM _____

system 52 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

total insets 45 W _____

PC2 220-240V _____

system 91 lm/W² _____

inset 104 lm/W³ _____

Physical

trim _____

length 218 mm _____

width 118 mm _____

height 95 mm _____

0.55 kg _____

Cutout

diameter 105 mm _____

length 205 mm _____

width 105 mm _____


min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____


recessed depth 100 mm _____

Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

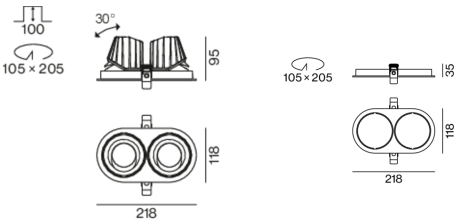

SASSO 100 round adjustable

trim 2 lamps

048-2720219W 048-2798318 002-90780



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



SASSO 100 round adjustable

trim 2 lamps

048-2720219W 048-2798318 002-90780



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 33 |
| B16 | 53 |
| B20 | 67 |
| B25 | 83 |
| C10 | 40 |
| C16 | 64 |
| C20 | 80 |
| C25 | 100 |

Components

MOUNTING SET with trim 2 lamps

| | | | |
|-----------------------------------|---------------------|--------------------------|----------------------------------|
| TYPE for intermediate ceilings | COLOUR jet black | L-W-H (MM) 218-118-35 | ARTICLE NUMBER(S) 048-2798318 |
|-----------------------------------|---------------------|--------------------------|----------------------------------|



CONVERTER

| | | |
|--------------|-------------------------|--------------------------------|
| TYPE 31 W | L-W-H (MM) 143-43-30 | ARTICLE NUMBER(S) 002-90780 |
|--------------|-------------------------|--------------------------------|



Electrical accessories

THROUGH WIRING CONNECTION BOX

| | | |
|-----------------------------------|-------------------------|----------------------------------|
| TYPE non DIM cable ø 4 – 12 mm | L-W-H (MM) 105-58-30 | ARTICLE NUMBER(S) 005-2531110 |
| DALI cable ø 4 – 12 mm | 105-58-30 | 005-2551110 |



Optional electrical accessories

DIN RAIL POWER SUPPLY

| | | |
|---------------|------------------------|----------------------------------|
| TYPE 160 W | L-W-H (MM) 72-90-63 | ARTICLE NUMBER(S) 005-6520210 |
|---------------|------------------------|----------------------------------|



DIN RAIL LED DRIVER

| | | |
|--|------------------------|----------------------------------|
| TYPE DALI-2 200-1050 mA 2 x 42W | L-W-H (MM) 36-88-59 | ARTICLE NUMBER(S) 005-6121030 |
|--|------------------------|----------------------------------|



Optical accessories

HONEYCOMB LOUVER

| | | |
|---------------------|--------------|----------------------------------|
| COLOUR jet black | Ø (MM) 50 | ARTICLE NUMBER(S) 007-1965598 |
|---------------------|--------------|----------------------------------|

