

SASSO 100 round adjustable

trim 2 lamps

048-2720214F 048-279831G 002-90780



Project / Type	
Notes	
Count / Date	



--	--	--	--	--

General

Ceiling , Recessed
tilt max 30°
rotation 360°
matt silver
Mounting set white aluminium
front IP40 , back IP20
4740 lm

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _r : 90 , R _{t(1-15)} : 89
MR 0.7
MDER 0.64


Optical

flood
beam angle 45°
UGR < 16 , ≥65° <3000 cd/m²


Electrical

non DIM
system 52 W
inset 22.7 W
36 Vf
650 mA
total insets 45 W
PC2 220-240V
system 91 lm/W ¹
inset 104 lm/W ²

Light distribution



Product drawing

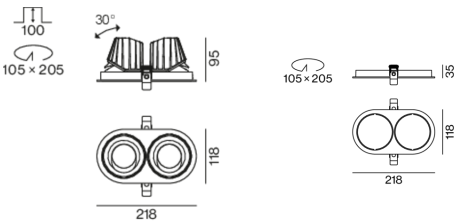

Physical

trim
length 218 mm
width 118 mm
height 95 mm
0.56 kg

Cutout

diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ incl. optical losses and the efficiency of the operating device (converter)
² incl. optical losses



SASSO 100 round adjustable

trim 2 lamps

048-2720214F 048-279831G 002-90780



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

