

# SASSO 100 round adjustable

trim

048-2720214F 048-279631G 002-90780



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 30°

rotation 360°

matt silver

Mounting set white aluminium

front IP40 , back IP20

2370 lm

fixture 104 lm/W<sup>1</sup>

### LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

### Optical

flood

beam angle 45°

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup>

### Electrical

non DIM

220-240 V

system 26.7 W

fixture 22.7 W

36 Vf

650 mA

PC2

### Physical

trim

diameter 118 mm

height 95 mm

0.45 kg

### Cutout

diameter 108 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

### Light distribution



### Product drawing

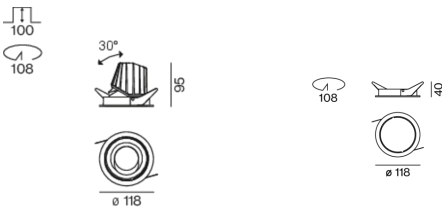

### Installation instructions



### Lighting calculator

