

SASSO 100 round adjustable

trimless exposed concrete

048-2720214S 048-2795210 002-90766



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 30°
 rotation 360°
 matt silver
 Mounting set white aluminium
 front IP40 , back IP20
 1550 lm

LED

3500 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 2 SDCM
 R_g: 99 , R_r: 90 , R_{t(1-15)}: 89
 MR 0.7
 MDER 0.64

Optical

spot
 beam angle 18°
 UGR < 13 , ≥65° <3000 cd/m²
 P_{stLM} ≤ 1.0¹
 SVM ≤ 0.4¹

Electrical

non DIM
 system 17.9 W
 inset 15.2 W
 36 Vf
 450 mA
 PC2 220-240V
 system 87 lm/W²
 inset 102 lm/W³

Physical


trimless for exposed concrete ceiling
 length 230 mm
 width 230 mm
 height 162 mm
 2.6 kg

Cutout


recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 18° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

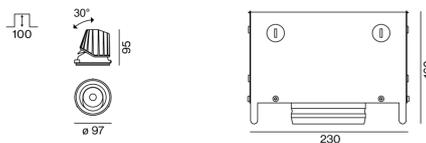

¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions



Lighting calculator

