

SASSO 100 round adjustable

trim

048-2720214M 048-2796317 002-90780



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
tilt max 30°
rotation 360°
matt silver
Mounting set traffic white
front IP40 , back IP20
2130 lm
fixture 94 lm/W ¹

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _f : 90 , R _{t(1-15)} : 89
MR 0.7
MDER 0.64

Optical

medium
beam angle 32°
UGR ≤ 16 , ≥65° <3000 cd/m ²

Electrical

non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2

Physical


trim
diameter 118 mm
height 95 mm
0.45 kg

Cutout


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

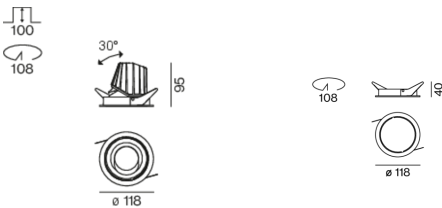

Installation instructions



Lighting calculator

