

SASSO 100 round adjustable

trimless exposed concrete

048-2720117X 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

white , RAL9016 ¹ _____

Mounting set white aluminium _____

front IP40 , back IP20 _____

2240 lm _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_r: 90 , R_{t(1-5)}: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

super wide flood _____

beam angle 63° _____

Electrical

non DIM _____

system 26.7 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

PC2 220-240V _____

system 84 lm/W² _____

inset 99 lm/W³ _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____

2.57 kg _____

Cutout


recessed depth 100 mm _____

¹ RAL code


² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Light distribution



Product drawing

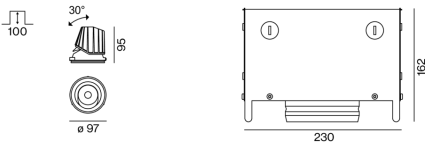

Installation instructions



Lighting calculator

