

SASSO 100 round adjustable

trimless


048-2720117M 048-2796117 002-90780



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Recessed
tilt max 30°
rotation 360°
white , RAL 9016 ¹
Mounting set traffic white
front IP40 , back IP20
2200 lm
fixture 97 lm/W ²

LED
4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 98 , R _r : 90 , R _t : 88
MR 0.8
MDER 0.72

Optical
medium
beam angle 33°
UGR ≤ 19

Electrical
non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2


Physical
trimless
diameter 105 mm
height 95 mm
0.47 kg

Cutout
diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm


¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR ≤ 19; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

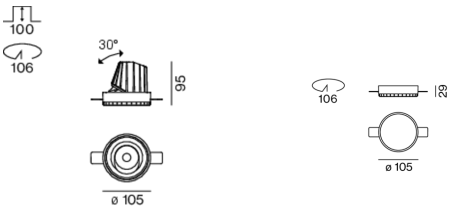

Installation instructions



Lighting calculator

