

SASSO 100 round adjustable


trim

048-2720111W 048-2796318 002-90780




Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

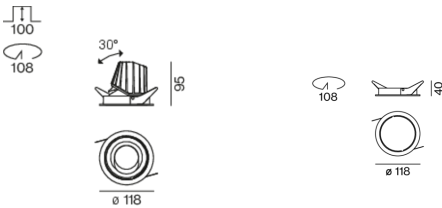

Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 30°	
rotation 360°	
black , RAL 9005 ¹	
Mounting set jet black	
front IP40 , back IP20	
2400 lm	
fixture 106 lm/W ²	

LED

4000 K	
CRI ≥ 90	
L80 / 50000 h	
initial MacAdam ≤ 2 SDCM	
R _g : 98 , R _r : 90 , R _{t(1-15)} : 88	
MR 0.8	
MDER 0.72	

Optical

wide flood	
beam angle 60°	
$\geq 65^\circ < 3000 \text{ cd/m}^2$	

Electrical

non DIM	
220-240 V	
system 26.7 W	
fixture 22.7 W	
36 Vf	
650 mA	
PC2	

Physical

trim	
diameter 118 mm	
height 95 mm	
0.45 kg	

Cutout

diameter 108 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

