

# SASSO 100 round adjustable

trim

048-2720111M 048-2796318 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 30°

rotation 360°

black , RAL 9005 <sup>1</sup>

Mounting set jet black

front IP40 , back IP20

2050 lm

fixture 90 lm/W<sup>2</sup>

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88

MR 0.8

MDER 0.72

Optical

medium

beam angle 33°

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup>

Electrical

non DIM

220-240 V

system 26.7 W

fixture 22.7 W

36 Vf

650 mA

PC2

Physical

trim

diameter 118 mm

height 95 mm

0.45 kg

Cutout


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

## Light distribution



## Product drawing

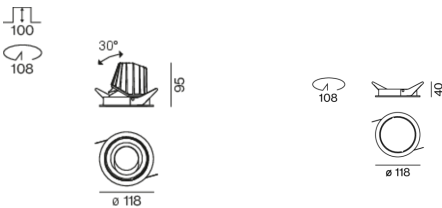

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

Installation instructions

Lighting calculator

