

# SASSO 100 round adjustable

trim 2 lamps

048-2720111F 048-2798318 002-90780



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 30°

rotation 360°

black , RAL9005 <sup>1</sup>

Mounting set jet black

front IP40 , back IP20

4640 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88

MR 0.8

MDER 0.72

### Optical

flood

beam angle 45°

UGR < 16 , ≥65° <3000 cd/m²

### Electrical

non DIM

system 52 W

inset 22.7 W

36 Vf

650 mA

total insets 45 W

PC2 220-240V

system 89 lm/W<sup>2</sup>

inset 102 lm/W<sup>3</sup>

### Physical

trim

length 218 mm

width 118 mm

height 95 mm

0.55 kg

### Cutout

diameter 105 mm

length 205 mm

width 105 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 45° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

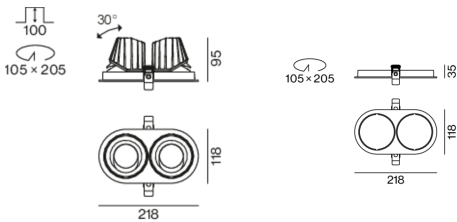

# SASSO 100 round adjustable

trim 2 lamps

048-2720111F 048-2798318 002-90780



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



# SASSO 100 round adjustable

trim 2 lamps

048-2720111F 048-2798318 002-90780



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.964                        | 0.923  | 0.884             | 0.847                           | 0.811  |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Faktor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 33                 |
| B16                            | 53                 |
| B20                            | 67                 |
| B25                            | 83                 |
| C10                            | 40                 |
| C16                            | 64                 |
| C20                            | 80                 |
| C25                            | 100                |

## Components

### MOUNTING SET with trim 2 lamps

|                                   |                     |                          |                                  |
|-----------------------------------|---------------------|--------------------------|----------------------------------|
| TYPE<br>for intermediate ceilings | COLOUR<br>jet black | L-W-H (MM)<br>218-118-35 | ARTICLE NUMBER(S)<br>048-2798318 |
|-----------------------------------|---------------------|--------------------------|----------------------------------|



### CONVERTER

|              |                         |                                |
|--------------|-------------------------|--------------------------------|
| TYPE<br>31 W | L-W-H (MM)<br>143-43-30 | ARTICLE NUMBER(S)<br>002-90780 |
|--------------|-------------------------|--------------------------------|



## Electrical accessories

### THROUGH WIRING CONNECTION BOX

|   |                                      |   |
|---|--------------------------------------|---|
| TYPE<br>non DIM cable ø 4 – 12 mm<br>DALI cable ø 4 – 12 mm | L-W-H (MM)<br>105-58-30<br>105-58-30 | ARTICLE NUMBER(S)<br>005-2531110<br>005-2551110 |
|---|--------------------------------------|---|



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|               |                        |                                  |
|---------------|------------------------|----------------------------------|
| TYPE<br>160 W | L-W-H (MM)<br>72-90-63 | ARTICLE NUMBER(S)<br>005-6520210 |
|---------------|------------------------|----------------------------------|



### DIN RAIL LED DRIVER

|  |                        |                                  |
|--|------------------------|----------------------------------|
| TYPE<br>DALI-2   200-1050 mA   2 x 42W | L-W-H (MM)<br>36-88-59 | ARTICLE NUMBER(S)<br>005-6121030 |
|--|------------------------|----------------------------------|



## Optical accessories

### HONEYCOMB LOUVER

|                     |              |                                  |
|---------------------|--------------|----------------------------------|
| COLOUR<br>jet black | Ø (MM)<br>50 | ARTICLE NUMBER(S)<br>007-1965598 |
|---------------------|--------------|----------------------------------|

