

SASSO 100 round adjustable

trim

048-2720114F 048-2796318 002-90780



| |
|----------------|
| Project / Type |
| Notes |
| Count / Date |



General

| |
|-------------------------------|
| Ceiling , Recessed |
| tilt max 30° |
| rotation 360° |
| matt silver |
| Mounting set jet black |
| front IP40 , back IP20 |
| 2420 lm |
| fixture 107 lm/W ¹ |

LED

| |
|---|
| 4000 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 2 SDCM |
| R _g : 98 , R _r : 90 , R _{t(1-15)} : 88 |
| MR 0.8 |
| MDER 0.72 |

Optical

| |
|---|
| flood |
| beam angle 45° |
| UGR ≤ 16 , ≥65° <3000 cd/m ² |

Electrical

| |
|----------------|
| non DIM |
| 220-240 V |
| system 26.7 W |
| fixture 22.7 W |
| 36 Vf |
| 650 mA |
| PC2 |

Physical


| |
|-----------------|
| trim |
| diameter 118 mm |
| height 95 mm |
| 0.45 kg |

Cutout


| |
|------------------------------|
| diameter 108 mm |
| min. ceiling thickness 2 mm |
| max. ceiling thickness 25 mm |
| recessed depth 100 mm |

¹ incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

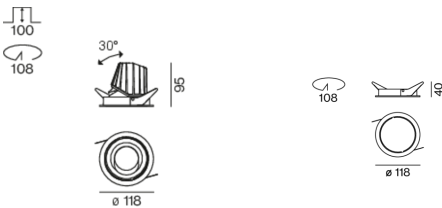

Installation instructions



Lighting calculator

