

SASSO 100 round adjustable

trimless exposed concrete

048-2720019S 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

gold , RAL260-M ¹ _____

Mounting set white aluminium _____

front IP40 , back IP20 _____

1990 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_r: 90 , R_{t(1-15)}: 87 _____

MR 0.6 _____

MDER 0.54 _____

Optical

spot _____

beam angle 18° _____

UGR < 13 _____

Electrical

non DIM _____

system 26.7 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

PC2 220-240V _____

system 75 lm/W² _____

inset 88 lm/W³ _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____


2.58 kg _____

Cutout


recessed depth 100 mm _____

¹ RAL code
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Light distribution



Product drawing

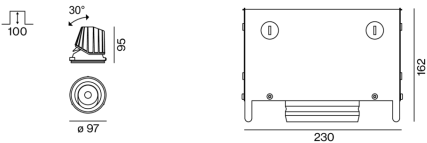

Installation instructions



Lighting calculator

