

SASSO 100 round adjustable

trimless exposed concrete

048-2720011M 048-2795210 002-90780



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL9005 ¹
Mounting set white aluminium
front IP40 , back IP20
1950 lm

LED
3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _r : 90 , R _{t(1-15)} : 87
MR 0.6
MDER 0.54


Optical
medium
beam angle 33°
UGR < 16 , ≥65° <3000 cd/m²

Electrical
non DIM
system 26.7 W
inset 22.7 W
36 Vf
650 mA
PC2 220-240V
system 73 lm/W ²
inset 86 lm/W ³


Physical
trimless for exposed concrete ceiling
length 230 mm
width 230 mm
height 162 mm
2.58 kg

Cutout
recessed depth 100 mm

Light distribution



Product drawing

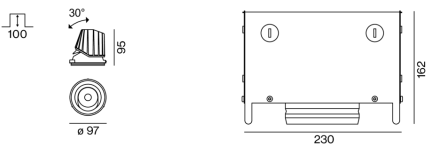

¹ RAL code
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Installation instructions



Lighting calculator

