

# SASSO 100 square downlight

trim 2 lamps

048-2710919M 048-279931G 002-90766



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
gold , RAL260-M<sup>1</sup>  
Mounting set white aluminium  
front IP44 , back IP20  
2920 lm

## LED

2700 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
 $R_g: 97, R_f: 91, R_{f(1-15)}: 87$   
MR 0.52  
MDER 0.47

## Optical

medium  
beam angle 33°x34°  
UGR  $< 16, \geq 65^\circ < 1500 \text{ cd/m}^2$   
PstLM  $\leq 1.0$ <sup>2</sup>  
SVM  $\leq 0.4$ <sup>2</sup>

## Electrical

non DIM  
system 35 W  
inset 15.2 W  
36 V  
450 mA  
total insets 30 W  
PC2 220-240V  
system 83 lm/W<sup>3</sup>  
inset 96 lm/W<sup>4</sup>

## Physical


trim  
length 218 mm  
width 118 mm  
height 75 mm  
0.57 kg

## Cutout


length 210 mm  
width 112 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm

Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33°x34° beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500 \text{ cd/m}^2$ ; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

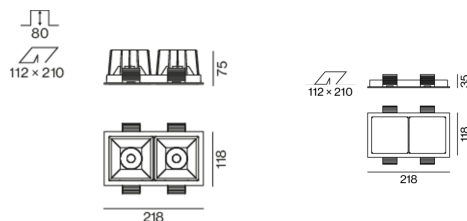

# SASSO 100 square downlight

trim 2 lamps

048-2710919M 048-279931G 002-90766



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

