

# SASSO 100 square downlight

trim 2 lamps

048-2710914M 048-279931G 002-90780



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

matt silver

Mounting set white aluminium

front IP44 , back IP20

4060 lm

fixture 90 lm/W<sup>1</sup>

## LED

2700 K

CRI  $\geq$  90

L80 / 50000 h

initial MacAdam  $\leq$  2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 87

MR 0.52

MDER 0.47

## Optical

medium

beam angle 33°x34°

UGR  $\leq$  16 ,  $\geq$  65° <3000 cd/m<sup>2</sup>

## Electrical

non DIM

220-240 V

system 52 W

fixture 22.7 W

36 V<sub>f</sub>

650 mA

fixture 45 W

PC2

## Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.55 kg

## Cutout

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

## Light distribution



## Product drawing

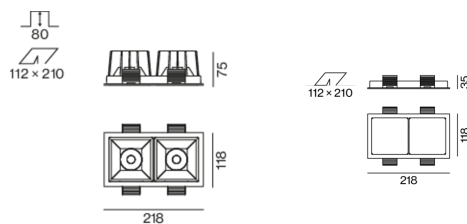

[048-2710914M 048-279931G 002-90780] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

19.04.2025

1 / 3

## Installation instructions



## Lighting calculator



048-2710914M 048-279931G 002-90780



Count / Date

# SASSO 100 square downlight

trim 2 lamps

048-2710914M 048-279931G 002-90780



Project / Type

Notes

Count / Date

## Electrical accessories

### THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-2531110
DALI cable ø 4 – 12 mm, Linect®-Ready	105-58-30	005-2551110

