

# SASSO 100 square downlight

trimless

048-2710119M 048-2797117 002-90766



Project / Type	
Notes	
Count / Date	



--	--	--	--

## General

Ceiling , Recessed
gold , RAL260-M <sup>1</sup>
Mounting set traffic white
front IP44 , back IP20
1590 lm

## LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 98 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 88
MR 0.8
MDER 0.72

## Optical


medium
beam angle 33°x34°
UGR < 16 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33°x34° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Electrical

non DIM
system 17.9 W
inset 15.2 W
36 Vf
450 mA
PC2 220-240V
system 89 lm/W <sup>3</sup>
inset 104 lm/W <sup>4</sup>

## Light distribution



## Product drawing

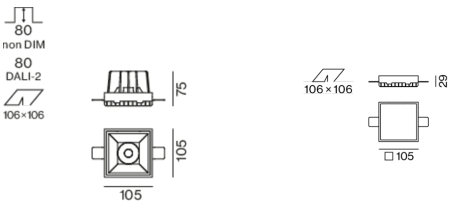

## Physical

trimless
length 106 mm
width 106 mm
height 75 mm
0.49 kg

## Cutout

length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# SASSO 100 square downlight

trimless

048-2710119M 048-2797117 002-90766



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

