

# SASSO 100 square downlight

trimless

048-2710117M 048-2797117 002-90780



Project / Type

Notes

Count / Date



220-240V

IP20  
IP44

X-PERT

X-PERT

General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

2260 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88

MR 0.8

MDER 0.72

Optical

medium

beam angle 34°

UGR < 19

Electrical

non DIM

26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

85 lm/W

inset 100 lm/W

Physical

trimless

length 105 mm

width 105 mm

height 75 mm

0.47 kg

Cutout

length 106 mm

width 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

<sup>1</sup> RAL code

## Light distribution



## Product drawing

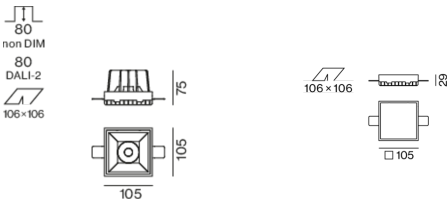

## Installation instructions



## Lighting calculator

