

SASSO 100 square downlight

trimless

048-2710019W 048-2797117 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

gold , RAL 260-M ¹

Mounting set traffic white

front IP44 , back IP20

2400 lm

fixture 106 lm/W²

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 90 , R_{t(1-15)}: 87

MR 0.6

MDER 0.54

Optical

wide flood

beam angle 65°

≥65° <1500 cd/m²

Electrical

non DIM

220-240 V

system 26.7 W

fixture 22.7 W

36 Vf

650 mA

PC2

Physical

trimless

length 105 mm

width 105 mm

height 75 mm

0.47 kg

Cutout

length 106 mm

width 106 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm

recessed depth 80 mm

¹ RAL code

² incl. consideration of optical losses & internal control unit losses


Installation instructions




Lighting calculator



Light distribution



Product drawing

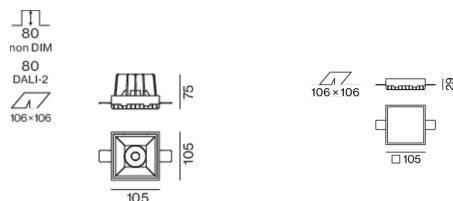

[048-2710019W 048-2797117 002-90780] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

20.04.2025

1 / 1