

# SASSO 100 square downlight

trim

048-2710011S 048-279731G 002-90780



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
black , RAL9005 <sup>1</sup>  
Mounting set white aluminium  
front IP44 , back IP20  
1990 lm

## LED

3000 K  
CRI ≥ 90  
L80 / 50000 h  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 87  
MR 0.6  
MDER 0.54

## Optical

spot  
beam angle 19°  
UGR < 13 , ≥65° <3000 cd/m<sup>2</sup>

## Electrical

non DIM  
system 26.7 W  
inset 22.7 W  
36 Vf  
650 mA  
PC2 220-240V  
system 75 lm/W<sup>2</sup>  
inset 88 lm/W<sup>3</sup>


## Physical

trim  
length 118 mm  
width 118 mm  
height 75 mm  
0.49 kg


## Cutout

length 112 mm  
width 112 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

## Light distribution



## Product drawing

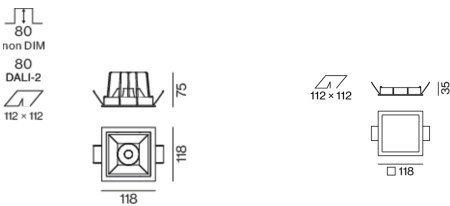

<sup>1</sup> RAL code  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

