

SASSO 100 round downlight

trim

048-2700919S 048-2796317 002-90780



Project / Type _____

Notes _____

Count / Date _____



General
Ceiling , Recessed
gold , RAL 260-M ¹
Mounting set traffic white
front IP44 , back IP20
1940 lm
fixture 86 lm/W ²

LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _f : 91 , R _{1-15} : 87
MR 0.52
MDER 0.47

Optical
spot
beam angle 19°
UGR ≤ 13 , ≥65° <3000 cd/m ²


Electrical
non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2

Physical
trim
diameter 118 mm
height 75 mm
0.45 kg


Cutout
diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

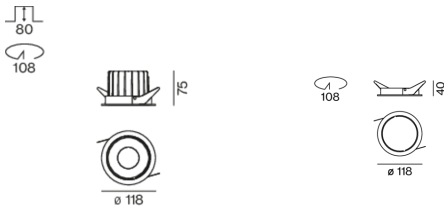

Installation instructions



Lighting calculator

