

SASSO 100 round downlight

trim

048-2700914W 048-2796317 002-90780



Project / Type

Notes

Count / Date



220-240V

↑ IP20

↓ IP44

X-PERT

X-PERT

General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

2290 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_f: 91 , R_{f(1-15)}: 87

MR 0.52

MDER 0.47

Optical

wide flood

beam angle 65°

≥65° <1500 cd/m²

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 86 lm/W¹

inset 101 lm/W²

Physical

trim

diameter 118 mm

height 75 mm

0.45 kg

Cutout

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ incl. optical losses and the efficiency of the operating device (converter)

² incl. optical losses

Light distribution



Product drawing

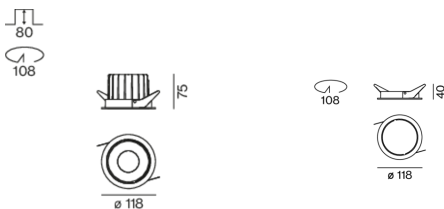

Installation instructions

Lighting calculator

