

SASSO 100 round downlight

trimless

048-2700914M 048-2796117 002-90766



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

1440 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_f: 91 , R_{f(1-15)}: 87

MR 0.52

MDER 0.47

Optical

medium

beam angle 33°

UGR < 13 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

non DIM

system 17.9 W

inset 15.2 W

36 Vf

450 mA

PC2 220-240V

system 80 lm/W²

inset 95 lm/W³

Physical

trimless

diameter 105 mm

height 75 mm

0.49 kg

Cutout

diameter 106 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

¹ Value of containing product at full load (undimmed)


² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Light distribution



Product drawing

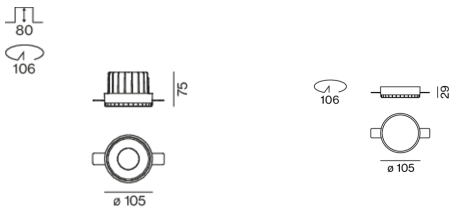

Installation instructions

Lighting calculator

