

# SASSO 100 round downlight

trimless exposed concrete

048-2700217W 048-2795210 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed  
rotation 360°  
white , RAL 9016 <sup>1</sup>  
Mounting set white aluminium  
front IP44 , back IP20  
2420 lm  
fixture 106 lm/W<sup>2</sup>

## LED

3500 K  
CRI ≥ 90  
L80 / 50000 h  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89  
MR 0.7  
MDER 0.64

## Optical

wide flood  
beam angle 66°

## Electrical

non DIM  
220-240 V  
system 26.7 W  
fixture 22.7 W  
36 Vf  
650 mA  
PC2


## Physical

trimless for exposed concrete ceiling  
length 230 mm  
width 230 mm  
height 162 mm  
2.58 kg


## Cutout

recessed depth 80 mm

## Light distribution



## Product drawing

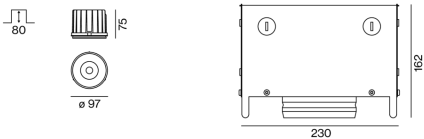

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

## Installation instructions



## Lighting calculator

