

SASSO 100 round downlight

trimless

048-2700217S 048-2796117 002-90780



Project / Type _____

Notes _____

Count / Date _____



220-240V

IP20
IP44

X-PERT

X-PERT

General

Ceiling , Recessed

white , RAL9016 ¹

Mounting set traffic white

front IP44 , back IP20

2120 lm

LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 90 , R_{t(1-15)}: 89

MR 0.7

MDER 0.64

Optical

spot

beam angle 19°

UGR < 19

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 79 lm/W²

inset 93 lm/W³

Physical

trimless

diameter 105 mm

height 75 mm

0.47 kg

Cutout


diameter 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Light distribution



Product drawing

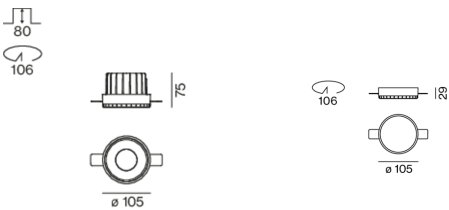

¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions



Lighting calculator

